


**GRUS S LED1X1100 C314 T740 L30 • 1021132**

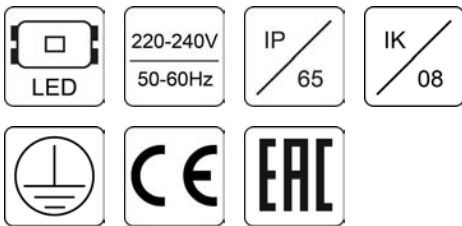

Product:	Grus S LED1x1100 C314 T740 L30
Order code:	1021132
Family:	Grus S LED
Product group:	Outdoor accent lighting

**GENERAL DATA**

<b>Description:</b>	A compact LED floodlight with aesthetic design and narrow beam optics Optics: 30° light beam Diffuser: tempered glass, impact resistant, with stainless steel screws Body: die-cast aluminum, dark grey finish, silicone rubber sealing provides reliable protection
<b>Installation:</b>	Suitable for any horizontal and/or vertical surfaces. Cable, 0.3m, 3x0.75mm2
<b>Environment</b>	Outdoor
<b>Application</b>	public space, facade illumination

**ELECTRICAL DATA**

<b>Mains voltage:</b>	220-240V, 50-60Hz	<b>System power*, W:</b>	11.3
<b>Power factor:</b>	>0,6	<b>Control gear:</b>	ECG on/off
<b>Connection:</b>	Cable, 0.3m, 3x0.75mm2		

**LIGHTING DATA**

<b>Light source and cap, W:</b>	LED	<b>Light source included:</b>	yes
<b>Luminaire output*, lm (ta+25°C):</b>	1087	<b>System efficacy, lm/W:</b>	96
<b>CRI (Ra):</b>	70+	<b>CCT, K:</b>	4000
<b>Distribution Type:</b>	Direct	<b>UGR index:</b>	-
<b>LED lifetime, h:</b>	50000/L70B50		

**TECHNICAL DATA**

<b>Net weight, kg:</b>	0.9	<b>Quantity in package, pcs:</b>	1
<b>Packaging volume, m3/pcs:</b>	0.00182	<b>Pallet quantity, pcs:</b>	470

**STANDARDS**

**Operating temperature range, °C:** -25...+40°C

**Protection class IEC:** I

**Ingress protection code:** IP65


**Mechanical impact resistance:** IK08

**EEC:** A+

**Certificates:** CE, RoHS

**Warranty:** 3 years

**Technical drawing (.jpg)**



D, mm	W, mm	C, mm
120	90	30
230	118	50
310	137	125

**Light distribution curve (.jpg)**

