




93101

Code	Nominal/lm	W	CCT	Beam
93101/15/3K	2270	29	3000K	15°
93101/15/4K	2300	29	4000K	15°
93101/28/3K	2270	29	3000K	28°
93101/28/4K	2300	29	4000K	28°
93101/42/3K	2270	29	3000K	42°
93101/42/4K	2300	29	4000K	42°

2 ANNI DI GARANZIA • YEARS OF GUARANTEE

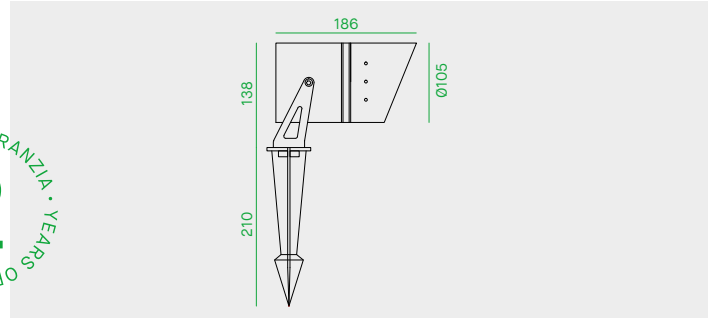

Proiettore LED con staffa e picchetto per installazione a pavimento.

LED projector with bracket and ground spike for installation.

Projecteur LED avec étrier et piquet pour installation au sol.

LED-Strahler mit Halterung und Pflock zur Bodeninstallation.

LED CREE

CREE LED

LED CREE

CREE LED

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h (Lichtstrom 70%).

Corpo in alluminio anodizzato.

Body in anodized aluminium.

Corps en aluminium anodisé.

Gehäuse in eloxiertem Aluminium.

Cavo in neoprene H05RN-F 3x1mm² di 1,50m.

Neoprene H05RN-F 3x1mm² cable of 1,50m.

Câble en néoprène H05RN-F 3x1mm² de 1,50m.

Neopren-Kabel H05RN-F 3x1mm² von 1,50m.

Alimentatore 220-240V - 50/60Hz incluso.

220-240V - 50/60Hz power supply included.

Alimentation 220-240V - 50/60Hz incluse.

Netzgerät 220-240V - 50/60Hz enthalten.

