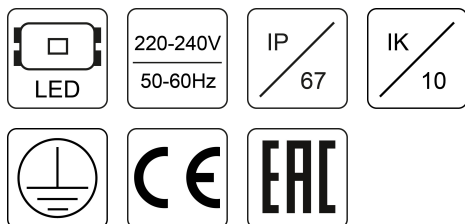


ATLAS M LED1X2000 D456 T840 L30 • 1101853

Product:	Atlas M LED1x2000 D456 T840 L30
Order code:	1101853
Family:	Atlas M LED
Product group:	Outdoor accent lighting

GENERAL DATA

Description:	A ground recessed LED floodlight with a choice of round or square stainless-steel frame. IP67 - water and dust protection for use in adverse conditions Diffuser: tempered glass, clear, impact resistant Ring: Stainless-steel, grade 316 Body: die-cast aluminum, dark grey finish, with anti-ageing silicone gasket
Installation:	Suitable for recessed mounting in any horizontal surface. Gravel must be used to ensure efficient drainage, 300 mm in depth and around. Supplied with thermoplastic recessed installation housing. Cable, 1.0m, 3x1.5mm2
Environment	Outdoor
Application	public space, facade illumination

ELECTRICAL DATA

Mains voltage:	220-240V, 50-60Hz	System power*, W:	19.4
Power factor:	>0,90	Control gear:	ECG on/off
Connection:	Cable, 1.0m, 3x1.5mm2		

LIGHTING DATA


Light source and cap, W:	LED	Light source included:	yes
Luminaire output*, lm (ta+25°C):	2013	System efficacy, lm/W:	104
CRI (Ra):	80+	CCT, K:	4000
Distribution Type:	Direct	LED lifetime, h:	50000/L70B50

TECHNICAL DATA

Net weight, kg:	4.5	Quantity in package, pcs:	1
Packaging volume, m3/pcs:	0.011319	Pallet quantity, pcs:	80

STANDARDS

Operating temperature range, °C:	-25...+40°C	Protection class IEC:	I
Ingress protection code:	IP67	Mechanical impact resistance:	IK10
EEC:	A+	Certificates:	CE, RoHS
Warranty:	3 years		
Technical drawing (.jpg)			

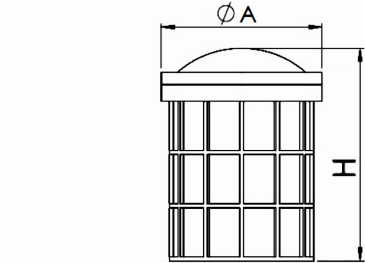

ϕA , mm	H, mm
200	235

Light distribution curve (.jpg)

