


Aluminium column SAL DP-407G



diameter Ø146mm at the base plate

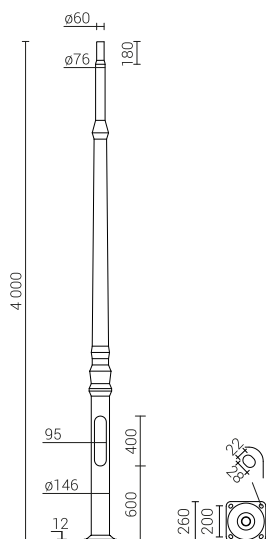

Anodising: 10 colours, each with possibility of chemical brightening

Finish: grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

Extension arm type: According to resistance calculations


Packing: sleeve material

Levels of energy absorption according to EN 12767:2019:

50-NE-B-S-SE-MD-0,

70-NE-B-S-SE-MD-0,

100-NE-B-S-SE-MD-0



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42970	SAL DP-407G	4m	4,2mm	20,8kg	0,139m ³	B-51 / Z-51	311151 / 311251	4008

SAL DP-407G		Acceptable windage of single luminaire [m ²] for Cx=1			
code 42970		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
Extension arm type	Permissible weight of a single luminaire	I zone, II Field category up to	I & III zone, II Field category up to 450m by s.l	II zone, II Field category up to	III zone, II Field category up to 755m by s.l
-	30	1.59	1.33	1.12	0.98
WA-17/1	10	0.78	0.63	0.50	0.42
WA-20/1	10	0.84	0.68	0.55	0.47
WA-20/2	8	0.44	0.34	0.25	0.19
WA-31 fi42	10	0.78	0.63	0.51	0.42
WR-7/1/0,5	15	1.32	1.11	0.92	0.80
WR-7/2/0,5	15	0.68	0.57	0.46	0.40
WR-23/1/0,76 fi42	15	0.98	0.81	0.66	0.57
WR-73/1/0,5	15	1.24	1.03	0.86	0.75

* Cradle to Cradle Certified® at Silver level applies only to products without the optional elastomer protection. Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute.

