



# Aluminium column SAL-3/B60

diameter Ø114mm at the base plate

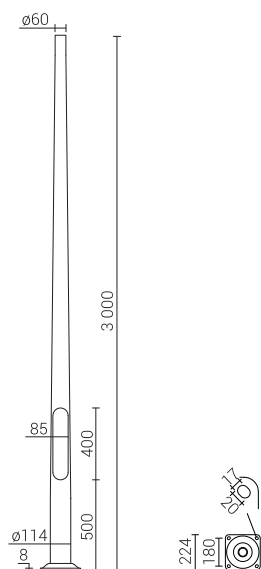

- Anodising:** 10 colours, each with possibility of chemical brightening
- Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)
- Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet
- Extension arm type:** According to resistance calculations
- Packing:** sleeve material
- Levels of energy absorption according to EN 12767:2019:**  
50-NE-B-S-SE-MD-0,  
70-NE-B-S-SE-MD-0,  
100-NE-B-S-SE-MD-0



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42120	SAL-3/B60	3m	3mm	8,7kg	0,067m <sup>3</sup>	B-50 / Z-50	311150 / 311205	4006

SAL-3/B60		Acceptable windage of single luminaire [m <sup>2</sup> ] for Cx=1			
Code 42120		Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s
type of extension arm	permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	20	0.92	0.77	0.64	0.56
WA-1	10	0.75	0.62	0.50	0.43
WA-4	10	0.57	0.46	0.35	0.29
WA-5/1	10	0.29	0.23	0.17	0.14
WA-14/1	10	0.37	0.29	0.22	0.18
WA-41 fi42	10	0.58	0.46	0.36	0.30
WR-4/1/0,5/5	-			ISKRA LED	
WR-4/1/0,5/5 ZP	-			ISKRA LED	
WR-8B/1/0,35/0	-			ISKRA LED	
WR-8B/1/0,35/5	-			ISKRA LED	
WR-8B/1/0,35/10	-			ISKRA LED	

\* Cradle to Cradle Certified® at Silver level applies only to products without the optional elastomer protection. Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute.

