


# Aluminium column SAL-5/B60

diameter Ø114mm at the base plate

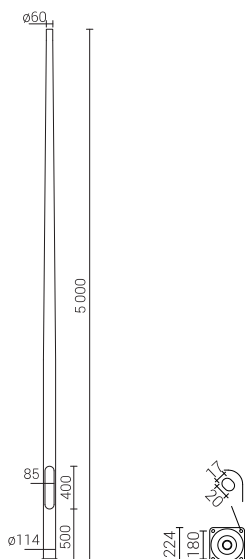

**Anodising:** 10 colours, each with possibility of chemical brightening

**Finish:** grinded, anodised aluminium, option of elastomer protection in the colour of the column up to the height of 350 mm (other height on customer's request)

**Luminaire mounting:** directly on the column, luminaires with mounting Ø60 mm with weight and surface parameters not exceeding the data from the strength table included in the technical data sheet

**Extension arm type:** According to resistance calculations


**Packing:** sleeve material

**Levels of energy absorption according to EN 12767:2019:**

50-NE-B-S-SE-MD-0,

70-NE-B-S-SE-MD-0,

100-NE-B-S-SE-MD-0



Code	Symbol	Height of the column	Wall thickness	Net weight	Approximate unit volume	Concrete footing / reinforcement basket type	Concrete footing / reinforcement basket code	Fasteners
42127	SAL-5/B60	5m	3mm	14,2kg	0,112m <sup>3</sup>	B-50 / Z-50	311150 / 311205	4006

SAL-5/B60

Acceptable windage of single luminaire [m<sup>2</sup>] for Cx=1

Code 42127	Vref. = 22 m/s	Vref. = 24 m/s	Vref. = 26 m/s	Vref. = 28 m/s	
Type of extension arm	Permissible weight of a single luminaire	I zone, II Field category	I & III zone, II Field category up to 450m by s.I	II zone, II Field category	III zone, II Field category up to 755m by s.I
-	15	0.29	0.22	0.16	0.12
WA-1	8	0.20	0.13	0.08	x
WA-14/1	8	0.08	x	x	x
WR-4/1/0,5/5	-	ISKRA LED			
WR-4/1/0,5/5 ZP	-	ISKRA LED			

\* Cradle to Cradle Certified® at Silver level applies only to products without the optional elastomer protection. Cradle to Cradle Certified® is a registered trademark of the Cradle to Cradle Products Innovation Institute.

